

## 200GHz Dense Wavelength Division Multiplexer(DWDM Module 4,8,16 Channel)

Flyin Optronics' 200GHz dense wavelength division multiplexer (DWDM module) utilizes thin film coating technology and proprietary design of non-flux metal bonding micro optics packaging to achieve optical add and drop at the ITU wavelengths. It provides ITU channel center wavelength, low insertion loss, high channel isolation, wide pass band, low temperature sensitivity and epoxy free optical path . It can be used for wavelength add/drop in telecommunication network system.

### Features

- Low Insertion Loss
- Wide pass band
- High Channel Isolation
- High Stability and reliability
- Epoxy-free on Optical Path

### Applications

- Channel Add/Drop
- DWDM Network
- Wavelength Routing
- Fiber Optical Amplifier
- CATV fiberoptic System



### Performance Specifications


Parameter	4 Channel		8 Channel		16 Channel		
	Mux	Demux	Mux	Demux	Mux	Demux	
Channel Wavelength (nm)	ITU 200GHz Grid						
Channel Spacing (nm)	200						
Channel Passband (@-0.5dB bandwidth (nm))	>0.5						
Insertion Loss (dB)	≤1.8		≤3.0		≤4.5		
Channel Uniformity (dB)	≤0.6		≤1.0		≤1.5		
Channel Ripple (dB)	0.3						
Isolation (dB)	Adjacent	N/A	>30	N/A	>30	N/A	>30
	Non-adjacent	N/A	>40	N/A	>40	N/A	>40
Inertion Loss Temperature Sensitivity (dB/°C)	<0.005						
Wavelength Temperature Shifting (nm/°C)	<0.002						
Polarization Dependent Loss (dB)	<0.1		<0.1		<0.15		
Polarization Mode Dispersion	<0.1						
Directivity (dB)	>50						
Return Loss (dB)	>45						
Maximum Power Handling (mW)	300						
Operatng Temperature (°C)	-5~+75						
Storage Temperature (°C)	-40~85						

Package dimension (mm)	A: L100 x W80 x H10 B: L120 x W80 x H18 C:L140 x W115 x H18
------------------------	---


Specifications may change without notice.

Above specification are for device without connector.


### Package Dimension

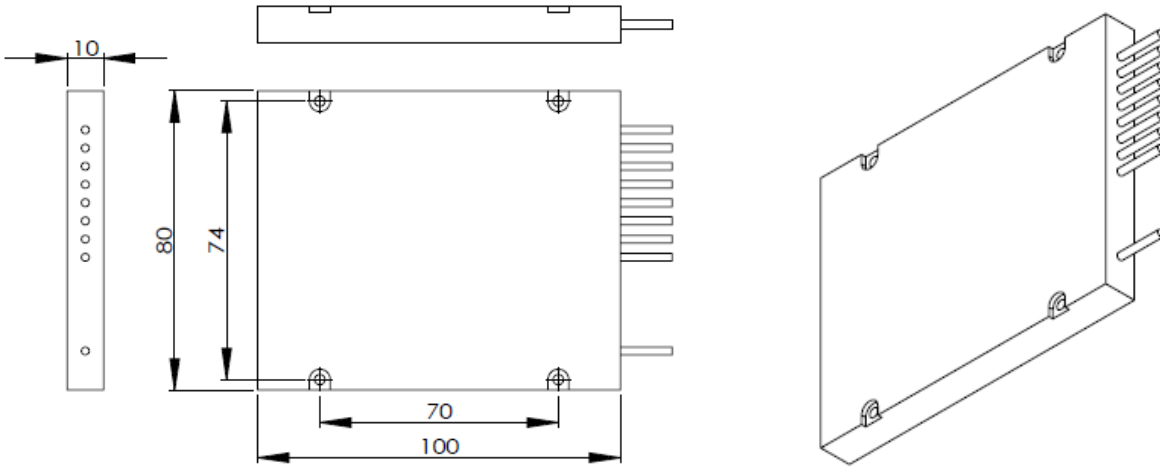

**A: 100X80X10 ABS box**

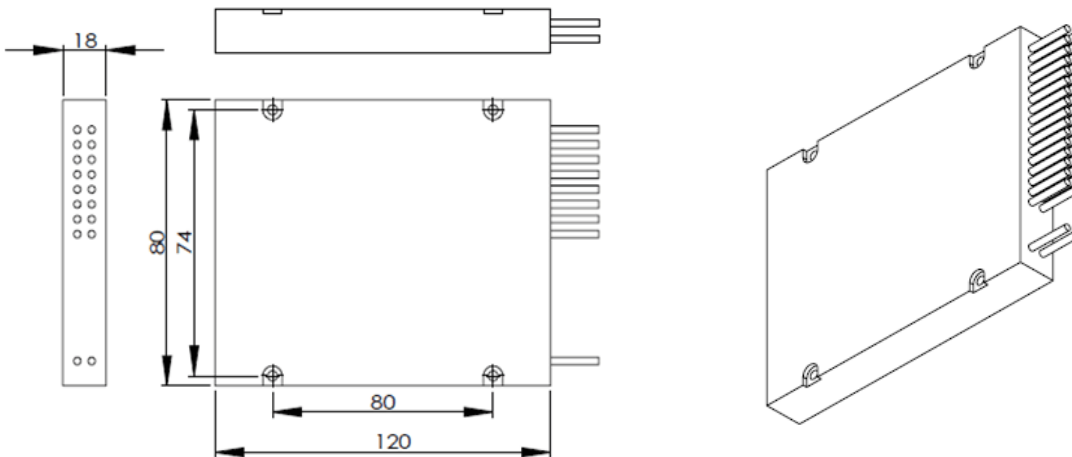

**B: 120X80X18 ABS box**

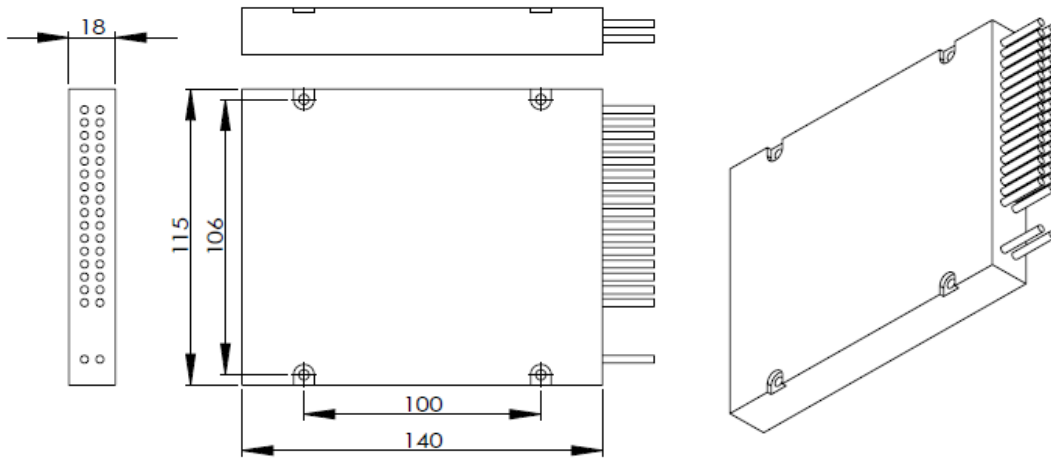

**C: 140X115X18 ABS box**

**Ordering Information**

DWDM	X	XX	X	XX	X	X	XX
	Channel Spacing	Number of Channels	Configuration	1st Channel	Fiber Type	Fiber Length	In/Out Connector
	2=200GHz	04=4 Channel 08=8 Channel 16=16 Channel	M=Mux D=Demux	21=Ch21 ..... 34=Ch34 ..... 50=Ch50 .....	1=Bare fiber 2=900um Loose tube 3=2mmCable 4=3mmCable	1=1m 2=2m	0=None 1=FC/APC 2=FC/PC 3=SC/APC 4=SC/PC 5=ST 6=LC